



P TILE Classic Homogeneous Vinyl Tile

Standard design of P tile which Tajima has developed. Impressive spotted design

TC0308167
JIS A 5705

TC0308167
JIS A 5705

Eco Mark
Certification
Number
10 123 001

Made with
Recycled Vinyl
Factory-based
Recycling

Long Lasting
Product
(3mm thick P TILE)

Low VOCs

Heavy Foot
Traffic

Thickness 2.0mm

Material Classification	Vinyl Composition Tile KT
Dimensions	2.0 (thickness)×304.8×304.8mm
Packing	50 tiles/case (approx. 4.65 m²)
Weight	18.3kg/case

Thickness 3.0mm

Material Classification	Vinyl Composition Tile KT
Dimensions	3.0 (thickness)×304.8×304.8mm
Packing	33 tiles/case (approx. 3.07 m²)
Weight	18.1kg/case

"3.0mm **Build-to-Order**" denotes build-to-order product.

Dimensions	3.0 (thickness)×304.8×304.8mm
Minimum Order Quantity	100 cases
Production lead time	10 days
Price	2,600 JPY/m² (material price)
	7,986 JPY/case (material price)
Packing	33 tiles/case (approx. 3.07 m²)






Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement KT/ Cement FK/ Cement AK-S/ Cement AK
Water resistant Installation		Cement U10/ Cement EP20

Notes

- "Low temperature method" is recommended when the temperature is under 10°C.
- Refer to pages 292 to 295 for how to properly use adhesive according to installation environment and conditions.



P-60

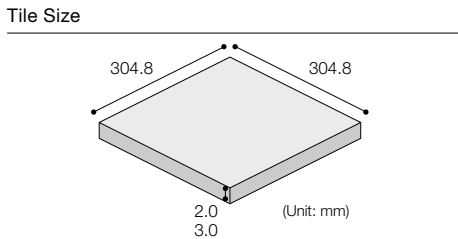

P-10, 12, 32, 44, 60, 74



P-12, 41, 44, 60, 62, 74

Product Color Numbers

P-1	4	16	21	32	11	61	10	81	16
10	12	17	8	35	15	62	14	82	17
11	3	22	9	41	6	74	1		
12	7	23	19	44	22	78	13		
13	5	25	18	60	2	80	20		

P TILE Modern

Chic design with a calm color variation

floor
score

TC0308167
JIS A 5705

JIS

TC0308167
JIS A 5705

Eco Mark
Certification
Number
10 123 002

環境
省エネ
マーク
EPA

Made with
Recycled Vinyl

Factory-based
Recycling

Low VOCs

Heavy Foot
Traffic

Thickness 2.0mm


Material Classification	Vinyl Composition Tile KT
Dimensions	2.0 (thickness)×304.8×304.8mm
Packing	50 tiles/case (approx. 4.65 m²)
Weight	18.3kg/case



Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement KT/ Cement FK/ Cement AK-S/ Cement AK
Water resistant Installation		Cement U10/ Cement EP20

- Notes
- "Low temperature method" is recommended when the temperature is under 10°C.
 - Refer to pages 292 to 295 for how to properly use adhesive according to installation environment and conditions.
 - Not available in 3.0mm thickness.

Tile Size





A-74

1



A-17

5



A-78

9



A-91

12



A-72

2



A-88

6



A-25

10



A-35

13



A-73

3




A-89

7



A-6

11



A-79

14



A-60

4



A-90

8



A-29

15



A-83

18



A-27

16



A-92

19



A-93

23



A-82

17




A-85

20



A-94

24



A-95

21



A-96

25



A-97

22



A-98

26



A-74


Product Color Numbers

A-6	11	35	13	78	9	88	6	93	23	98	26
17	5	60	4	79	14	89	7	94	24		
25	10	72	2	82	17	90	8	95	21		
27	16	73	3	83	18	91	12	96	25		
29	15	74	1	85	20	92	19	97	22		



A-27, 74, 79, 94, 95, 97

Floor Design

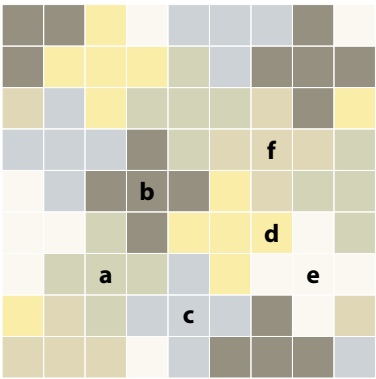

- a: A-95
b: A-79
c: A-97
d: A-94
e: A-74
f: A-27
- Installing the same ratio.

P TILE Muji

Extensive color options. Special UV protection finishing

floor
score

TC0308167
JIS A 5705

JIS

TC0308167
JIS A 5705

環境
配慮
製品

MADE WITH RECYCLED VINYL

Low VOCs

Antifouling

Factory-based
Recycling

Heavy Foot
Traffic


Thickness 2.0mm


Material Classification	Vinyl Composition Tile KT
Dimensions	2.0 (thickness)×304.8×304.8mm
Packing	50 tiles/case (approx. 4.65 m ²)
Weight	18.9kg/case




Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement KT/ Cement FK/ Cement AK-S/ Cement AK
Water resistant Installation		Cement U10/ Cement EP20

- Notes
- "Low temperature method" is recommended when the temperature is under 10°C.
 - Refer to pages 292 to 295 for how to properly use adhesive according to installation environment and conditions.
 - Not available in 3.0mm thickness.

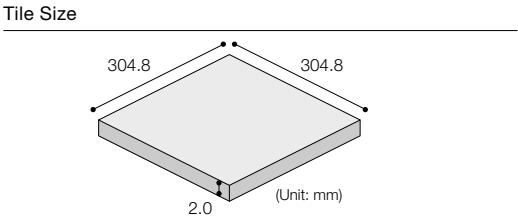



PRD-401 1



PRD-467 5



PRD-402 10



PRD-403 15



PRD-408 2



PRD-409 6



PRD-460 11



PRD-481 16




PRD-466 3



PRD-463 7



PRD-461 12



PRD-475 17



PRD-470 4



PRD-471 8




PRD-472 13



PRD-473 18




PRD-445 9



PRD-449 14



PRD-474 19



PRD-468 20



PRD-469 25



PRD-404 30



PRD-479 21



PRD-480 26



PRD-482 22



PRD-483 27



PRD-484 31




PRD-476 23



PRD-477 28



PRD-478 32



PRD-451 24



PRD-454 29



PRD-401, 404


Product Color Numbers

PRD-401 1	409 6	460 11	468 20	473 18	478 32	483 27
402 10	445 9	461 12	469 25	474 19	479 21	484 31
403 15	449 14	463 7	470 4	475 17	480 26	
404 30	451 24	466 3	471 8	476 23	481 16	
408 2	454 29	467 5	472 13	477 28	482 22	



PRD-408, 460, 466, 482, 483

Floor Design

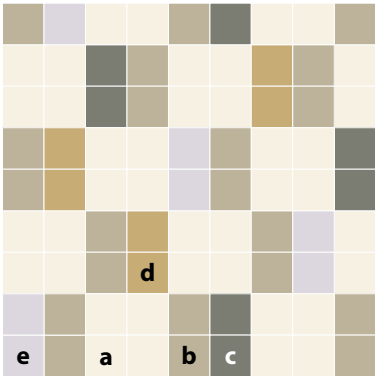

- a: PRD-408 (50%)
- b: PRD-460 (25%)
- c: PRD-483 (8.3%)
- d: PRD-482 (8.3%)
- e: PRD-466 (8.3%)