

SLIP RESISTANT VINYL FLOORING



Performance Icons

Abrasion Resistant
Shows level of durability in relation to traffic based on evaluation criteria for abrasion resistance.

Medium Foot Traffic

Super Heavy Foot Traffic

Heavy Foot Traffic

Slip Resistant function
Indicates a flooring product that offers good Slip Resistant function performance.

Slip Resistant function

Shock Absorption
Indicates flooring with a foam layer that provides a high level of shock absorption, making it safer in case someone falls down.

Shock Absorption

Antibacterial
Indicates flooring that suppresses bacterial growth.

Antibacterial

Mold Resistant
Indicates flooring that suppresses mold growth.

Mold Resistant

Weather Resistance
Indicates flooring that offers an excellent level of outdoor performance (resistant against UV rays, etc.).

Weather Resistance

Visibility
Indicates flooring that offers Visibility.

Visibility

Chemical Resistant
Indicates flooring that cannot easily colored or discolored by ordinary chemicals.

Antichemical

Heat Shielding Performance
Indicates flooring that reduces the level of temperature increase of the sheet surface caused by reflecting near-infrared sunlight.

Heat Shielding

Sound Absorbing
Indicates flooring that reduces the sound of foot traffic.

Sound Absorbing

Easy to Clean
Indicates flooring that has an embossed pattern shape which makes it easy to remove dirt and dust.

Easy to Clean

Heat Resistant
Indicates flooring that offers heat resistance even against boiling water, tempura oil, etc.

Heat Resistant

Other Symbols

JIS Mark
Indicates that a registered certification organization approved by Japan has recognized that the product satisfies Japanese Industrial Standards.

Green Purchasing Law Compliant Product Mark
Indicates Green Purchasing Law Compliant Product specified by the InteriorFloor Industrial Association.

FloorScore® Certification
Indicates product that has been certified for indoor air environments by the Resilient Floor Covering Institute (RFCI, based in the US) and SCS, a third-party certification organization.

Effective Use of Resources/Low VOCs

Indicates product that is made using recycled vinyl, such as recycled vinyl film for agricultural use.

Made with Recycled Vinyl

Indicates product that is made using scrap materials (including scrap wood) that are produced in factories.

Factory-based Recycling

Indicates products with low VOCs.

Low VOCs

Slip Resistant Vinyl Flooring

Product Name	Thickness (mm)	Dimensions (mm)	Page
VIEWGISTA GRAN-Gio	2.5	1,820×10m	164
		1,620×10m	
		1,350×10m	
		1,250×10m	
VIEWGISTA GRAN-Block	2.5	1,820×10m	165
		1,620×10m	
		1,350×10m	
VIEWGISTA MULTI Hardwood	2.5	1,820×10m	166
		1,350×10m	
VIEWGISTA MULTI Lattice	2.5	1,820×10m	167
		1,620×10m	
		1,350×10m	
VIEWGISTA MULTI Sandstone	2.5	1,820×10m	168
		1,350×10m	
VIEWGISTA MULTI Stripe	2.5	1,820×10m	169
		1,350×10m	
VIEWGISTA SAND-Hexa	2.5	1,820×10m	170
		1,620×10m	
		1,350×10m	
VIEWGISTA SAND-Stone	2.5	1,820×10m	171
		1,350×10m	
VIEWGISTA PLUS-Easy Walk	2.5	1,350×10m	172
		1,820×10m	
VIEWGISTA PLUS-Easy Clean	2.5	1,820×10m	173
		1,350×10m	
VIEWGISTA PLUS-Heat Shield	1.8	1,820×10m	174
		1,350×10m	
VIEWGISTA PLUS-Quiet Walk	3.5	1,350×10m	175
		1,820×10m	
VIEWGISTA STEP VLT	Revision 3.9	1,250mm width 950mm width	176
VIEWGISTA STEP VST	Revision 3.9	1,250mm width 950mm width	178
VIEWGISTA STEP CP	6.5	1,250mm width	180
		950mm width	
CP SHEET	4.0	310×20m	180
VIEWGISTA STEP YVLT Gio Type	3.9	1,250mm width 950mm width	181
		1,250mm width 950mm width	
VIEWGISTA STEP YVST Gio Type	3.9	1,250mm width 950mm width	181
VIEWGISTA HOLLOW DRAIN EX	NEW		
VIEWGISTA HOLLOW DRAIN HOLDER EX	NEW	-	182
CORNER GUARD			
VIEWGISTA DRAIN EX			
VIEWGISTA HOLDER EX	-	-	183
EVACUATION HATCH SIGN			
VIEWGISTA AQUA	2.5	1,820×10m	184
VIEWGISTA STEP VST AQUA Type	3.9	1,850mm width	185
		1,350×10m	
Sheet Vinyl for Risers	1.8	1,350×10m	185
VIEWGISTA Supplementary Installation Materials			
VIEWGISTA Performance			
DEODORANT-CLINSEF	NEW	2.0	1,820×9m
CULINA	Revision	2.0	1,820×9m
SR Sheet 4300	2.5	1,230×10m	190
SR Sheet 2800	2.0	1,820×9m	191

SLIP RESISTANT VINYL FLOORING

163

VIEWGISTA GRAN-Gio

High-durability inlaid design sheet series with universal embossed pattern

floor

score

TC0315008
JIS A 5705

JIS

TC0315008
JIS A 5705

Low VOCs

Weather
Resistance

Slip Resistant
function

Heavy Foot
Traffic

Antichemical

Thickness 2.5mm

Price (material price)	3,950 JPY/m²
Material Classification	Multilayer Vinyl Flooring FS
1,250mm width	4,938 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,250mm (width) × 10m (length)
Packing	10m/roll
Weight	31.8kg/roll
1,350mm width	5,333 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	34.3kg/roll
1,620mm width	6,399 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,620mm (width) × 10m (length)
Packing	10m/roll
Weight	41.1kg/roll
1,820mm width	7,189 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	46.1kg/roll

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160047
------------------	---

Product Color Numbers	
VGG-701	706
702	707
703	708
704	
705	

VGG-701

VGG-702

VGG-703

VGG-704

VGG-705

VGG-706

VGG-707

VGG-708

Related Item Compatibility Chart

	Step		Welding Rods	VG Sealant	DRAIN EX
	Same color/pattern				
VGG-701	VLT-701	VST-701	V-701Y	VG-1	VDN-101
VGG-702	VLT-702	VST-702	V-702Y	VG-2	VDN-113
VGG-703	VLT-703	VST-703	V-703Y	VG-4	VDN-112
VGG-704	VLT-704	VST-704	V-704Y	VG-3	VDN-108
VGG-705	-		V-705Y	VG-7	VDN-107
VGG-706	VLT-706	VST-706	V-706Y	VG-6	VDN-114
VGG-707	-		V-707Y	VG-8	VDN-113
VGG-708	-		V-708Y	VG-9	VDN-106
Page	⇒ 176	⇒ 178	-	⇒ 186	⇒ 183

VGG-701

Sheet Size/Cross Section/Configuration

Sheet Size

1,820mm

1,620mm

1,350mm

1,250mm

10m

Cross Section Image

Inlaid Layer

Glass Layer

2.5mm

Pattern (mm)

136.5

45.5

* Please understand that pattern matching is not possible.

Product Color Numbers	
VGB-701	
702	
703	
704	
706	

VGB-701

VGB-702

VGB-703

VGB-704

VGB-706

Related Item Compatibility Chart

	Step		Welding Rods	VG Sealant	DRAIN EX
	Color Equivalent				
VGB-701	VLT-701	VST-701	V-701Y	VG-1	VDN-101
VGB-702	VLT-702	VST-702	V-702Y	VG-2	VDN-113
VGB-703	VLT-703	VST-703	V-703Y	VG-4	VDN-112
VGB-704	VLT-704	VST-704	V-704Y	VG-3	VDN-108
VGB-706	VLT-706	VST-706	V-706Y	VG-6	VDN-114
Page	⇒ 176	⇒ 178	-	⇒ 186	⇒ 183

VGB-706

Sheet Size/Cross Section/Configuration

Sheet Size

1,820mm

1,620mm

1,350mm

1,250mm

10m

Cross Section Image

Inlaid Layer

Glass Layer

2.5mm

Pattern (mm)

178

87

* Please understand that pattern matching is not possible.

VIEWGISTA GRAN-Block

High-durability inlaid design sheet series with large ceramic tile pattern

floor

score

TC0315008
JIS A 5705

JIS

TC0315008
JIS A 5705

Low VOCs

Weather
Resistance

Slip Resistant
function

Heavy Foot
Traffic

Antichemical

Thickness 2.5mm

Price (material price)	3,750 JPY/m²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	5,063 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	34.3kg/roll
1,620mm width	6,075 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,620mm (width) × 10m (length)
Packing	10m/roll
Weight	41.1kg/roll
1,820mm width	6,825 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	46.1kg/roll

Build-to-Order 1,250mm width

Price	4,688 JPY/m
Minimum Order Quantity	200m per color
Production lead time	3 weeks

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160047
------------------	---

164

Slip Resistant function Vinyl Flooring Weather Resistance, Antislip Products

165

VIEWGISTA MULTI Hardwood

High designability series - Natural wooden texture



Low VOCs

Weather Resistance

Heavy Foot Traffic

Easy to Clean

Slip Resistant function

Antichemical

Thickness **2.5mm**

Price (material price)	3,550 JPY/m ²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	36.8kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	49.5kg/roll



Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics


Flame Resistance	Flame Resistance Performance Test Number E1160050
------------------	---

Product Color Numbers


VML-630
631
632
633




VML-630

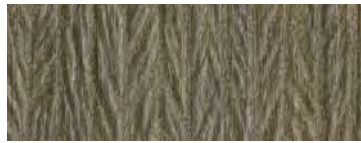

VML-631



VML-632

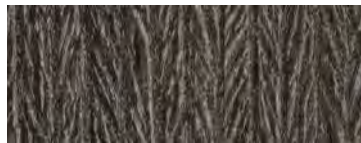

VML-633

Related Item Compatibility Chart


	Step	Welding Rods	VG Sealant	DRAIN EX
VML-630	-	V-630Y	VG-2	VDN-113
VML-631	-	V-631Y	VG-2	VDN-113
VML-632	-	V-632Y	VG-8	VDN-113
VML-633	-	V-633Y	VG-8	VDN-113
Page	-	-	⇒ 186	⇒ 183




VML-631

Sheet Size/Cross Section

Sheet Size



Cross Section Image



Product Color Numbers

VML-600
601
602
603




VML-600



VML-602



VML-601



VML-603

Related Item Compatibility Chart


	Step		Welding Rods	VG Sealant	DRAIN EX
	Same color/pattern				
VML-600	VLT-600	VST-600	V-600Y	VG-7	VDN-107
VML-601	VLT-601	VST-601	V-601Y	VG-6	VDN-114
VML-602	VLT-602	VST-602	V-602Y	VG-8	VDN-113
VML-603	-		V-603Y	VG-9	VDN-106
Page	⇒ 177	⇒ 179	-	⇒ 186	⇒ 183




VML-602

Sheet Size/Cross Section/Configuration


Sheet Size



Cross Section Image



Pattern (mm)



* Please understand that pattern matching is not possible.

VIEWGISTA MULTI Lattice

High designability series - Delicate woven-fabric pattern



Low VOCs

Weather Resistance

Heavy Foot Traffic

Slip Resistant function

Antichemical

Thickness **2.5mm**

Price (material price)	3,550 JPY/m ²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	36.8kg/roll
1,620mm width	5,751 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,620mm (width) × 10m (length)
Packing	10m/roll
Weight	44.1kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	49.5kg/roll



Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160050
------------------	---

VIEWGISTA MULTI Sandstone

High designability series - Natural stone texture

floor score

TC0315008

JIS A 5705

JIS

TC0315008

JIS A 5705

Low VOCs

Weather Resistance


Slip Resistant function

Heavy Foot Traffic

Antichemical

Thickness 2.5mm

Price (material price)	3,550 JPY/m²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	36.8kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	49.5kg/roll

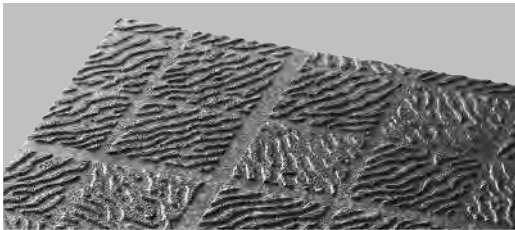

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160050
------------------	---



VML-610



VML-611

Related Item Compatibility Chart

	Step	Welding Rods	VG Sealant	DRAIN EX
VML-610	-	V-610Y	VG-1	VDN-107
VML-611	-	V-611Y	VG-5	VDN-106
Page	-	-	⇒ 186	⇒ 183



VML-610

Sheet Size/Cross Section/Configuration

Sheet Size

Cross Section Image

Pattern (mm)

* Please understand that pattern matching is not possible.

Product Color Numbers

VML-620
621
622



VML-621



VML-622



VML-620

Related Item Compatibility Chart

	Step	Welding Rods	VG Sealant	DRAIN EX
VML-620	-	V-620Y	VG-5	VDN-106
VML-621	-	V-621Y	VG-3	VDN-108
VML-622	-	V-622Y	VG-8	VDN-113
Page	-	-	⇒ 186	⇒ 183



VML-620

Sheet Size/Cross Section/Configuration

Sheet Size

Cross Section Image

Pattern (mm)

* Please understand that pattern matching is not possible.

VIEWGISTA MULTI Stripe

High designability series - Straight stream design

floor score

TC0315008

JIS A 5705

JIS

TC0315008

JIS A 5705

Low VOCs

Weather Resistance

Slip Resistant function

Heavy Foot Traffic

Antichemical

Thickness 2.5mm

Price (material price)	3,550 JPY/m²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	36.8kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	49.5kg/roll



Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160050
------------------	---

VIEWGISTA SAND-Hexa

Standard universal design with hexagonal emboss and natural color

floor

score

TC0315008

JIS A 5705

JIS

TC0315008

JIS A 5705

Low VOCs

Weather Resistance

Heavy Foot Traffic


Mold Resistant

Slip Resistant function

Antichemical

Thickness 2.5mm

Price (material price)	3,550 JPY/m²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	36.1kg/roll
1,620mm width	5,751 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,620mm (width) × 10m (length)
Packing	10m/roll
Weight	43.2kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	48.5kg/roll

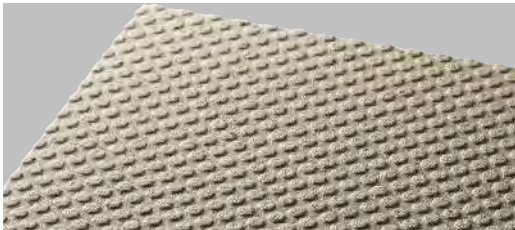

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160048
------------------	---

Product Color Numbers

VSH-401	406
402	
403	
404	
405	



VSH-405



VSH-406



VSH-401



VSH-403



VSH-402



VSH-404

Related Item Compatibility Chart

	Step		Welding Rods	VG Sealant	DRAIN EX
	Same color/pattern				
VSH-401	VLT-401	VST-401	V-401Y	VG-1	VDN-101
VSH-402	VLT-402	VST-402	V-402Y	VG-2	VDN-113
VSH-403	VLT-403	VST-403	V-403Y	VG-4	VDN-112
VSH-404	VLT-404	VST-404	V-404Y	VG-9	VDN-106
VSH-405	-		V-405Y	VG-1	VDN-107
VSH-406	-		V-406Y	VG-4	VDN-111
Page	⇒ 176	⇒ 178	-	⇒ 186	⇒ 183



VSH-403

Sheet Size/Cross Section/Configuration

Sheet Size

1,820mm

1,620mm

1,350mm

10m

Cross Section Image

Color Layer

Glass Layer

2.5 mm

Pattern (mm)

H5-I

317

* Please understand that pattern matching is not possible.

Product Color Numbers

VSS-402
403
404

VIEWGISTA SAND-Stone

Standard universal embossed design which does not require pattern matching

floor

score

TC0315008

JIS A 5705

JIS

TC0315008

JIS A 5705

Low VOCs

Weather Resistance

Heavy Foot Traffic

Mold Resistant

Slip Resistant function

Antichemical



VSS-402



VSS-403



VSS-404

Related Item Compatibility Chart

	Step		Welding Rods	VG Sealant	DRAIN
	Color Equivalent				
VSS-402	VLT-402	VST-402	V-402Y	VG-2	VDN-113
VSS-403	VLT-403	VST-403	V-403Y	VG-4	VDN-112
VSS-404	VLT-404	VST-404	V-404Y	VG-9	VDN-106
Page	⇒ 176	⇒ 178	-	⇒ 186	⇒ 183

Thickness 2.5mm

Price (material price)	3,550 JPY/m²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	36.1kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	48.5kg/roll

Build-to-Order

1,620mm width

Price	5,751 JPY/m
Minimum Order Quantity	200m per color
Production lead time	3 weeks



Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160048
------------------	---



VSS-404

Sheet Size/Cross Section/Configuration

Sheet Size

1,820mm

1,620mm

1,350mm

10m

Cross Section Image

Color Layer

Glass Layer

2.5 mm

Pattern (mm)

261

317

* Please understand that pattern matching is not possible.

VIEWGISTA PLUS-Easy Walk

High performance series with an additional unique function. Combines both smoothness and slip resistance



Low VOCs

Weather Resistance

Heavy Foot Traffic

Easy to Clean

Slip Resistant function

Antichemical

Mold Resistant

Thickness 2.5mm

Price (material price)	3,750 JPY/m ²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	5,063 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	40.5kg/roll
1,820mm width	6,825 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	54.5kg/roll

Build-to-Order 1,250mm width

Price	4,688 JPY/m
Minimum Order Quantity	200m per color
Production lead time	3 weeks



Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1180085
------------------	---

Product Color Numbers

VPD-640
641
642
643



VPD-640



VPD-642



VPD-641



VPD-643

Related Item Compatibility Chart

	Step	Welding Rods	VG Sealant	DRAIN
VPD-640	-	V-640Y	VG-3	VDN-108
VPD-641	-	V-641Y	VG-2	VDN-113
VPD-642	-	V-642Y	VG-4	VDN-111
VPD-643	-	V-643Y	VG-5	VDN-112
Page	-	-	⇒ 186	⇒ 183



Effects of Low-depth Gradated Embossing

Surface grip strength is achieved by providing a gradated embossing that allows the soles of footwear to easily make contact with the embossing. The effects of low-depth embossing also include the reduction of caster noise that occurs when moving carts, luggages etc. and easy broom-based cleaning.



Grips the soles of footwear which makes stumbling difficult even when sliding one's feet on the floor



Reduction of caster noise generated by moving wheeled luggage, etc.




Easy broom-based cleaning



VPD-641

Sheet Size/Cross Section/Configuration

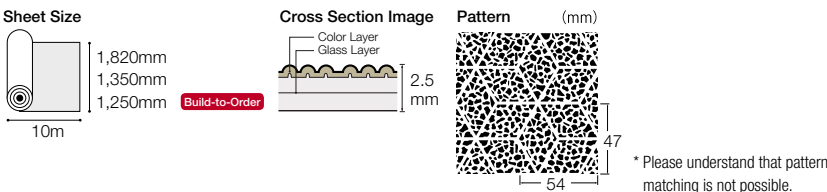

Product Color Numbers

VPC-401
402
403
404



VPC-401



VPC-403



VPC-402



VPC-404


Related Item Compatibility Chart

	Step				Welding Rods	VG Sealant	DRAIN
	Same color/pattern		Color Equivalent				
VPC-401	VLT-4011	VST-4011	VLT-401	VST-401	V-401Y	VG-1	VDN-101
VPC-402	VLT-4021	VST-4021	VLT-402	VST-402	V-402Y	VG-2	VDN-113
VPC-403	VLT-4031	VST-4031	VLT-403	VST-403	V-403Y	VG-4	VDN-112
VPC-404	VLT-4041	VST-4041	VLT-404	VST-404	V-404Y	VG-9	VDN-106
Page	⇒ 177	⇒ 179	⇒ 176	⇒ 178	-	⇒ 186	⇒ 183




An Embossed Pattern Shape that Allows for Easy Removal of Dirt and Dust

Floors of apartment building corridors, balconies, etc. require frequent cleaning from the dust which residents brought and which comes from the outside. Easy Clean makes daily cleaning much easier.

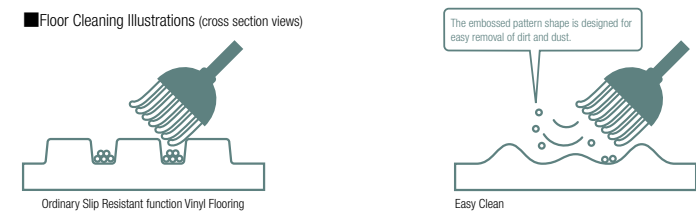

VPC-401

Sheet Size/Cross Section/Configuration

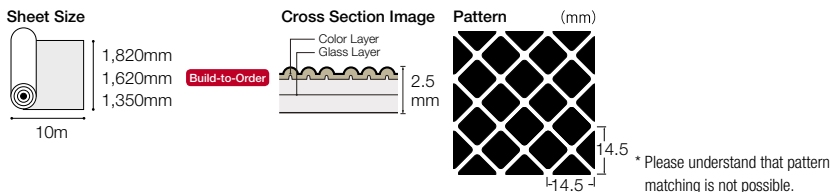

VIEWGISTA PLUS-Easy Clean

High performance series with an additional unique function. Special embossed pattern allows for easy cleaning



Low VOCs

Weather Resistance

Heavy Foot Traffic

Easy to Clean

Slip Resistant function

Antichemical


Mold Resistant

Thickness 2.5mm

Price (material price)	3,550 JPY/m ²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	4,793 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	37.4kg/roll
1,820mm width	6,461 JPY/m
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	50.2kg/roll

Build-to-Order 1,620mm width

Price	5,751 JPY/m
Minimum Order Quantity	200m per color
Production lead time	3 weeks

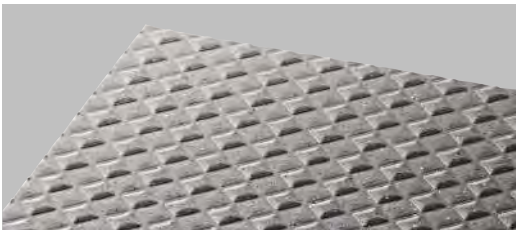

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid applied Membrane Waterproofing	Cement VG		

Notes

- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Pattern matching is not possible when installing over a large area.
- Please ask us for available size.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160052
------------------	---

VIEWGISTA PLUS-Heat Shield

High performance series with an additional unique function. Specifically designed for balcony use, it offers excellent thermic comfort

floor score

TC0315008
JIS A 5705

JIS

Low VOCs

Weather Resistance

Slip Resistant function


Heavy Foot Traffic

Antichemical

Heat Shielding

Mold Resistant

Thickness 1.8mm	
Price (material price)	3,750 JPY/m ²
Material Classification	Multilayer Vinyl Flooring FS
1,350mm width	5,063 JPY/m
Dimensions	1.8mm (thickness of projected areas) × 1,350mm (width) × 10m (length)
Packing	10m/roll
Weight	26.9kg/roll
1,820mm width	6,825 JPY/m
Dimensions	1.8mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	36.1kg/roll

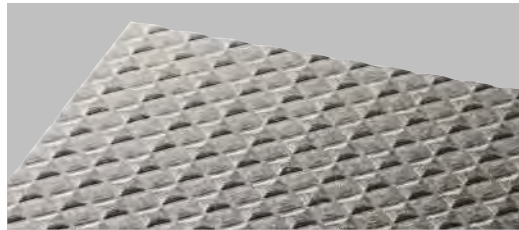

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20/ Cement VG	Welded using designated welding rod	VG Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

- Notes
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
 - Pattern matching is not possible when installing over a large area.
 - Please ask us for available size.

Special Characteristics	
Flame Resistance	Flame Resistance Performance Test Number E1160053



VPB-501



VPB-502



VPB-503

Related Item Compatibility Chart

	Step	Welding Rods	VG Sealant	DRAIN
VPB-501	-	V-501Y	VG-7	VDN-107
VPB-502	-	V-502Y	VG-3	VDN-112
VPB-503	-	V-503Y	VG-6	VDN-114
Page	-	-	⇒ 186	⇒ 183




Provides a High Level of Heat Shielding Even Against the sun ray in the Middle of Summer

Reflects the near-infrared region of sunlight to provide heat shielding and greatly suppress rises in floor surface temperature in summer.



Preventing Building Frame Deterioration Caused by Changes in Temperature

Preventing concrete deterioration which is caused by high temperature.

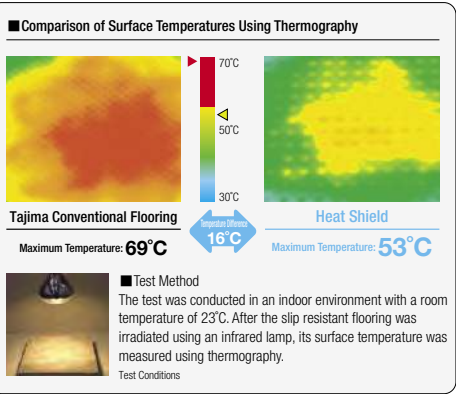

VPB-501

Sheet Size/Cross Section/Configuration

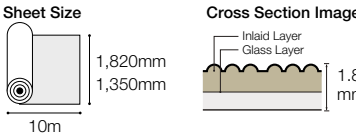

* Please understand that pattern matching is not possible.

Product Color Numbers	
VPA-401	402
405	406

VIEWGISTA PLUS-Quiet Walk

High performance series with an additional unique function. High sound absorbing performance with special foam layer

floor score

TC0315008
JIS A 5705

Low VOCs

Weather Resistance

Slip Resistant function

Heavy Foot Traffic

Sound Absorbing

Shock Absorption

Antichemical



VPA-405



VPA-401



VPA-406



VPA-402



Related Item Compatibility Chart

	Step	Welding Rods	VG Sealant	DRAIN
VPA-401	-	V-401Y	VG-1	VDN-101
VPA-402	-	V-402Y	VG-2	VDN-113
VPA-405	-	V-405Y	VG-1	VDN-107
VPA-406	-	V-406Y	VG-4	VDN-111
Page	-	-	⇒ 186	⇒ 183





Reduces the Sound Created from Walking

Noise generated by traffic in common corridors, on stairs, etc. is quite disturbing when there is a high level of traffic or when people are walking at midnight. Since Quiet Walk has foam layer, it absorbs walking sound and is suitable for where you want to reduce.

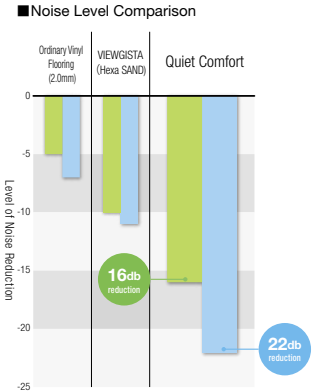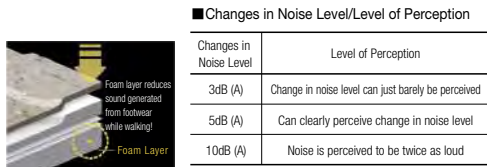

VPA-405

Sheet Size/Cross Section/Configuration

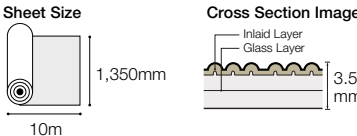

* Please understand that pattern matching is not possible.

VIEWGISTA STEP VLT

An integrated step flooring with weather resistance, slip resistance and visibility

- Low VOCs
- Weather Resistance
- Super Heavy Foot Traffic
- Antichemical
- Easy to Clean
- Slip Resistant function
- Visibility
- Mold Resistant
- (Easy Clean type only)

Thickness 3.9mm (950mm width)

Price (material price)	5,800 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 950mm (width) × 500mm (depth), Stair Nosing Type: 5R (10R: Build-to-Order)
Packing	7 units/case
Weight	1.6kg/unit

Thickness 3.9mm (1,250mm width)

Price (material price)	7,700 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 1,250mm (width) × 500mm (depth) Stair Nosing Type: 5R (10R: Build-to-Order)
Packing	7 units/case
Weight	2.1kg/unit

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete Steel Plate Urethane Waterproofing	Cement VG	Welded using designated welding rod	VG Sealant


Notes

- Special order sizes: Widths of 800mm, 850mm, 900mm, 1,050mm to 1,950mm (in 100mm increments) and 2,000mm. Please contact us about details.
- Please make anti-rust treatment when working with steel plate subfloor.
- Units cannot be joined together widthwise.
- 10R stair nosing product is build-to -order. Please contact us about details.
- 1 tube of Cement DB is included with each case.


Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1140159
------------------	---

Configuration (Unit: mm)

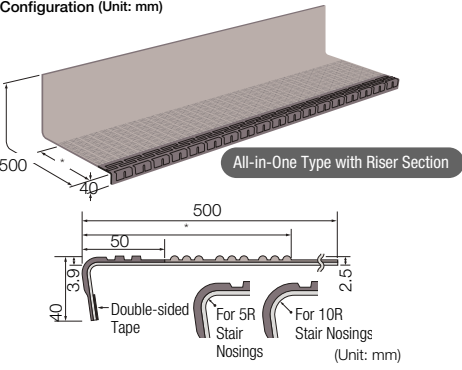


Gio Type

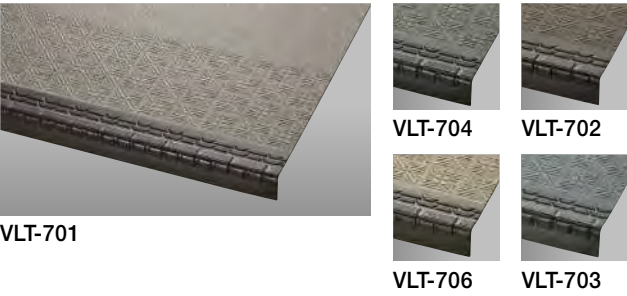


Related Item Compatibility Chart

	Sheet		Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent		
VLT-701	VGG-701	VGB-701	V-701Y	VG-1
VLT-702	VGG-702	VGB-702	V-702Y	VG-2
VLT-703	VGG-703	VGB-703	V-703Y	VG-4
VLT-704	VGG-704	VGB-704	V-704Y	VG-3
VLT-706	VGG-706	VGB-706	V-706Y	VG-6
Page	⇒ 164	⇒ 165	-	⇒ 186

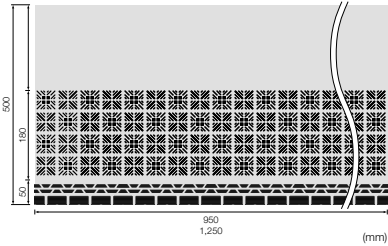


Hexa Type

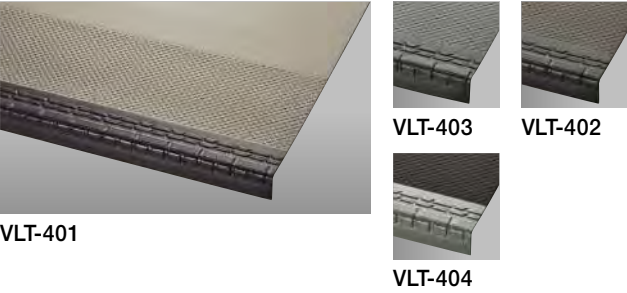


Related Item Compatibility Chart

	Sheet			Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent			
VLT-401	VSH-401	-	VPC-401	V-401Y	VG-1
VLT-402	VSH-402	VSS-402	VPC-402	V-402Y	VG-2
VLT-403	VSH-403	VSS-403	VPC-403	V-403Y	VG-4
VLT-404	VSH-404	VSS-404	VPC-404	V-404Y	VG-9
Page	⇒ 170	⇒ 171	⇒ 173	-	⇒ 186

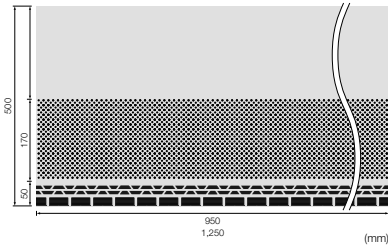


Lattice Type

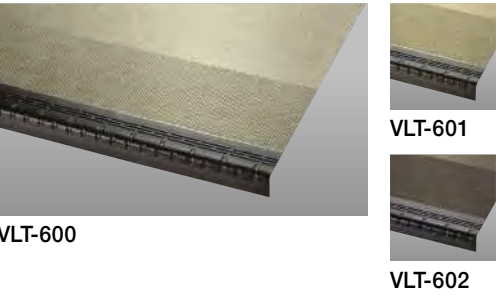


Related Item Compatibility Chart

	Sheet		Welding Rods	VG Sealant
	Same color/pattern	VML-600		
VLT-600	Same color/pattern	VML-600	V-600Y	VG-7
VLT-601	Same color/pattern	VML-601	V-601Y	VG-6
VLT-602	Same color/pattern	VML-602	V-602Y	VG-8
Page	⇒ 167	-	-	⇒ 186

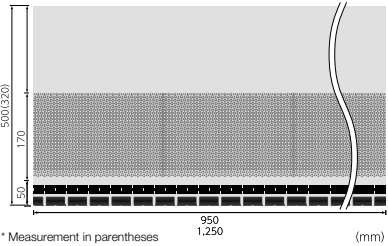


Easy Clean Type

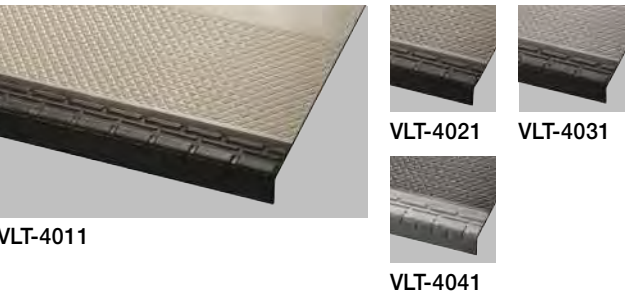

Related Item Compatibility Chart

	Sheet			Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent			
VLT-4011	VPC-401	VSH-401	-	V-401Y	VG-1
VLT-4021	VPC-402	VSH-402	VSS-402	V-402Y	VG-2
VLT-4031	VPC-403	VSH-403	VSS-403	V-403Y	VG-4
VLT-4041	VPC-404	VSH-404	VSS-404	V-404Y	VG-9
Page	⇒ 173	⇒ 170	⇒ 171	-	⇒ 186

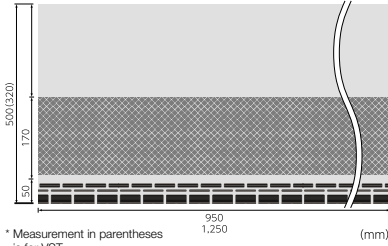

Product Color Numbers				
VLT-701	401	600	4011	
702	402	601	4021	
703	403	602	4031	
704	404		4041	
706				

VIEWGISTA STEP VST

Specially designed for stair treads, with weather resistance, slip resistance and visibility

- Low VOCs
- Weather Resistance
- Super Heavy Foot Traffic
- Antichemical
- Easy to Clean
- Slip Resistant function
- Visibility
- Mold Resistant
- (Easy Clean type only)



Thickness 3.9mm (950mm width)	
Price (material price)	4,750 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 950mm (width) × 320mm (depth), Stair Nosing Type: 5R (10R: Build-to-Order)
Packing	7 units/case
Weight	1.1kg/unit

Thickness 3.9mm (1,250mm width)	
Price (material price)	6,300 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 1,250mm (width) × 320mm (depth) Stair Nosing Type: 5R (10R: Build-to-Order)
Packing	7 units/case
Weight	1.5kg/unit



Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete Plain Steel Plate Urethane Waterproofing	Cement VG	Welded using designated welding rod	VG Sealant

- Notes
- Special order sizes: Widths of 800mm, 850mm, 900mm, 1,050mm to 1,950mm (in 100mm increments) and 2,000mm. Please contact us about details.
 - Please make anti-rust treatment when working with plain steel plate subfloor.
 - Units cannot be joined together widthwise.
 - 10R stair nosing product is build-to -order. Please contact us about details.
 - 1 tube of Cement DB is included with each case.

Special Characteristics	
Flame Resistance	Flame Resistance Performance Test Number E1140159

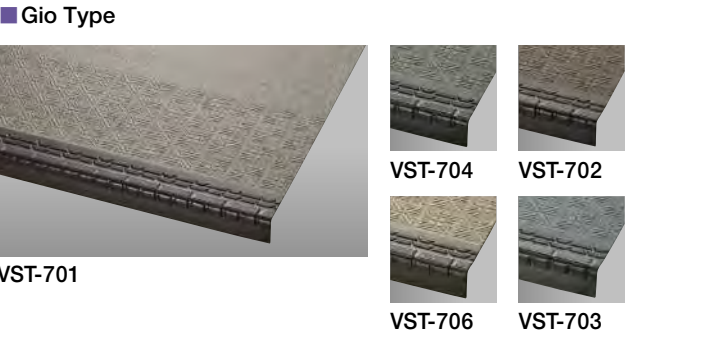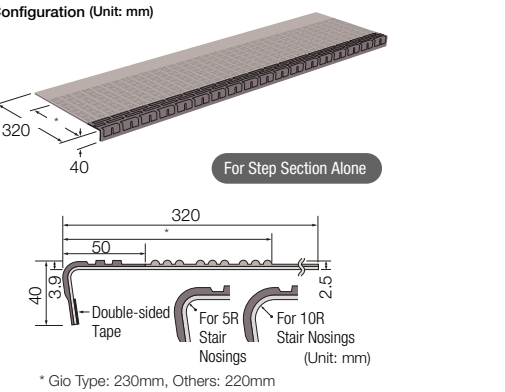



	Sheet		Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent		
VST-701	VGG-701	VGB-701	V-701Y	VG-1
VST-702	VGG-702	VGB-702	V-702Y	VG-2
VST-703	VGG-703	VGB-703	V-703Y	VG-4
VST-704	VGG-704	VGB-704	V-704Y	VG-3
VST-706	VGG-706	VGB-706	V-706Y	VG-6
Page	⇒ 164	⇒ 165	-	⇒ 186

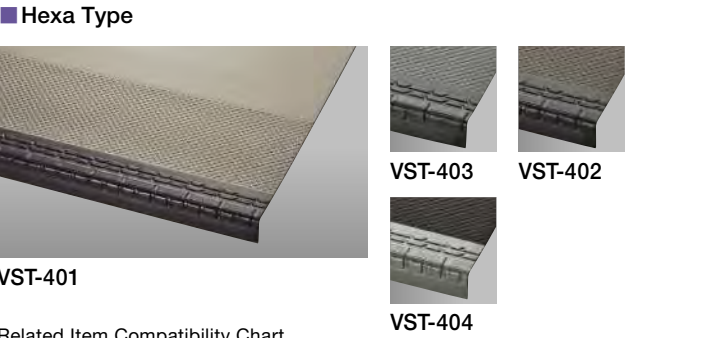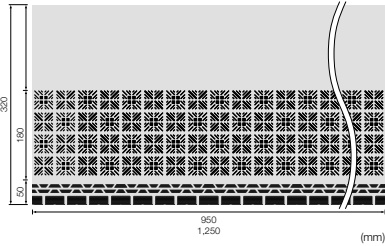



Related Item Compatibility Chart

VST-404


	Sheet			Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent			
VST-401	VSH-401	-	VPC-401	V-401Y	VG-1
VST-402	VSH-402	VSS-402	VPC-402	V-402Y	VG-2
VST-403	VSH-403	VSS-403	VPC-403	V-403Y	VG-4
VST-404	VSH-404	VSS-404	VPC-404	V-404Y	VG-9
Page	⇒ 170	⇒ 171	⇒ 173	-	⇒ 186

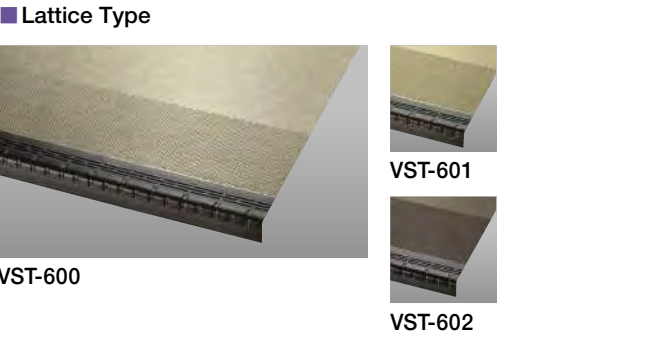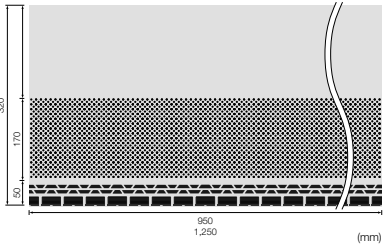

	Sheet		Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent		
VST-600	VML-600	-	V-600Y	VG-7
VST-601	VML-601	-	V-601Y	VG-6
VST-602	VML-602	-	V-602Y	VG-8
Page	⇒ 167	-	-	⇒ 186

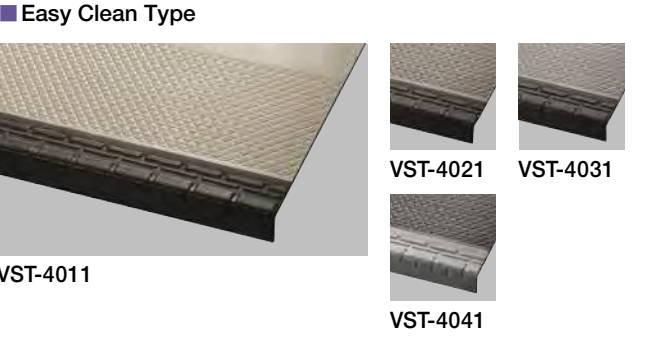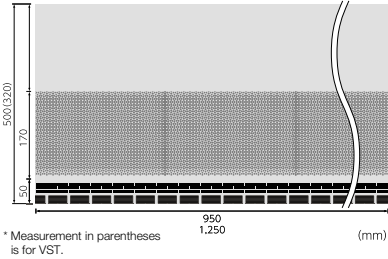

Related Item Compatibility Chart					
	Sheet			Welding Rods	VG Sealant
	Same color/pattern	Color Equivalent			
VST-4011	VPC-401	VSH-401	-	V-401Y	VG-1
VST-4021	VPC-402	VSH-402	VSS-402	V-402Y	VG-2
VST-4031	VPC-403	VSH-403	VSS-403	V-403Y	VG-4
VST-4041	VPC-404	VSH-404	VSS-404	V-404Y	VG-9
Page	⇒ 173	⇒ 170	⇒ 171	-	⇒ 186

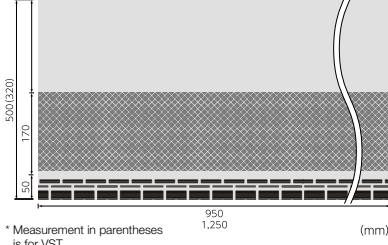

Product Color Numbers				
VST-701	401	600	4011	
702	402	601	4021	
703	403	602	4031	
704	404		4041	
706				



VST-701

VIEWGISTA STEP CP

Build-to-Order Product

Step flooring sheet with foam layer to improve sound absorption

- Low VOCs
- Weather Resistance
- Super Heavy Foot Traffic
- Antichemical
- Shock Absorption
- Slip Resistant function
- Visibility
- Sound Absorbing


Build-to-Order	Thickness 7.9mm (950mm width)
Price (material price)	6,500 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use w/Foam Layer
Dimensions	7.9mm (thickness of projected areas on stair nosing section) × 950mm (width) × 320mm (depth), Stair Nosing Type: 5R
Packing	4 units/case
Weight	1.7kg/unit
Minimum Order Quantity	4 cases (16 units)
Production lead time	3 weeks



Build-to-Order	Thickness 7.9mm (1,250mm width)
Price (material price)	8,600 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use w/Foam Layer
Dimensions	7.9mm (thickness of projected areas) × 1,250mm (width) × 320mm (depth) Stair Nosing Type: 5R
Packing	4 units/case
Weight	2.2kg/unit
Minimum Order Quantity	4 cases (16 units)
Production lead time	3 weeks

Installation Method	Subfloor	Basic Specifications	Seams	Edge
Basic Installation	Checker Plate	VG Primer CP/VIEWGISTA STEP CP	VG Sealant	VG Sealant

All VIEWGISTA STEP series can be upgraded to VIEWGISTA STEP CP. It reduces 23.5dB stair noise*, this is suitable for steel stairs and where the footstep echoes. (*In-house measurement value. Not a guaranteed value.) Product No.: VST-□□□CP (put the color number of VIEWGISTA STEP into "□□□")

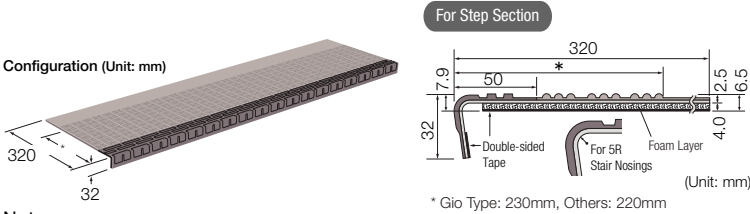


Notes

- Special order sizes: Widths of 800mm, 850mm, 900mm, 1,050mm to 1,950mm (in 100mm increments) and 2,000mm. Please contact us about details.
- Please make anti-rust treatment when working with steel plate subfloor.
- Units cannot be joined together widthwise.
- Yellow star nosing available, please contact us about information.
- Color of foam layer may be changed to reddish brown due to UV rays but it does not affect its performance.
- 1 tube of Cement DB is included with each case.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1180095
------------------	---

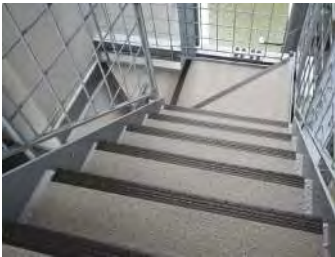

CP SHEET

Build-to-Order Product

Sound absorbing subfloor sheet for stair landing, for use with VIWEGISTA STEP CP


- Low VOCs
- Sound Absorbing
- Shock Absorption

Build-to-Order	Thickness 4.0mm
Price (material price)	4,500 JPY/m ²
Material Classification	Foam Sheet w/Single-sided Adhesive Tape
Dimensions	4.0mm (thickness) × 310mm (width) × 20m (length)
Packing	20m/roll
Weight	9.9kg/roll



Notes


- Please make anti-rust treatment when working with steel plate subfloor.
- Foam layer color may become reddish brown due to UV rays. However, this does not affect performance due to the characteristics of the material.




This sheet is specially designed for landings that have a checker plate subfloor. Please use it together with a pattern sheet used with VIEWGISTA STEP CP. Its 4mm foam layer reduces noise produced when walking on stairs made of checker plate.

Product Color Numbers
VST-□□□CP


Product Color Numbers
YVLT-701 YVST-701
702 702
703 703
704 704
706 706

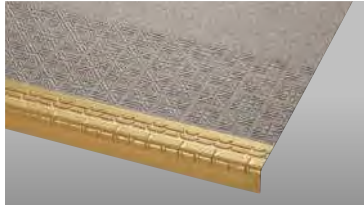

YVLT-701/YVST-701

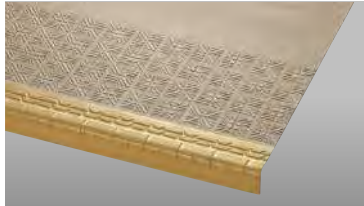

YVLT-706/YVST-706

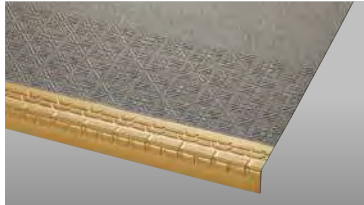

YVLT-704/YVST-704


* Also available with designs other than Gio Type. Please contact us for details.

Build-to-Order Product


VIEWGISTA STEP YVLT Gio Type

Features a yellow stair nosing section for improved visibility


- Low VOCs
- Weather Resistance
- Super Heavy Foot Traffic
- Antichemical
- Slip Resistant function
- Visibility

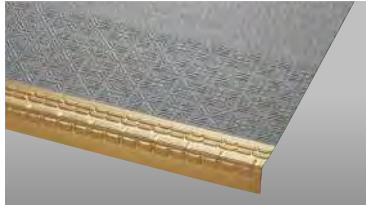

YVLT-703/YVST-703

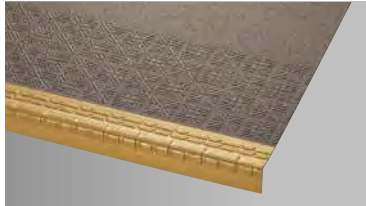

YVLT-702/YVST-702

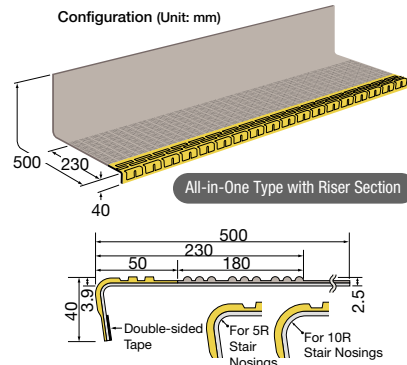


Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1140184
------------------	---

Build-to-Order Product


VIEWGISTA STEP YVST Gio Type

- Low VOCs
- Weather Resistance
- Super Heavy Foot Traffic
- Antichemical
- Slip Resistant function
- Visibility

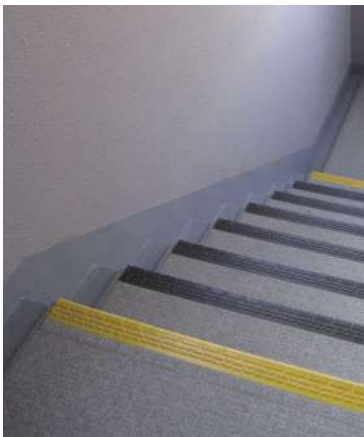

(YVST-703, VST-703)

* Also available with designs other than Gio Type. Please contact us for details.

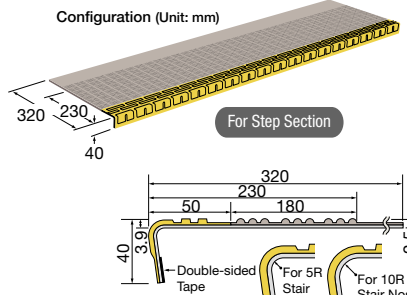

Notes

- Special order sizes: Widths of 800mm, 850mm, 900mm, 1,050mm to 1,950mm (in 100mm increments) and 2,000mm. Please contact us about details.
- Please make anti-rust treatment when working with plain steel plate subfloor.
- Units cannot be joined together widthwise.
- 1 tube of Cement DB is included with each case.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1140184
------------------	---

Build-to-Order	Thickness 3.9mm (950mm width)
Price (material price)	6,000 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 950mm (width) × 500mm (depth), Stair Nosing Types: 5R, 10R
Packing	7 units/case
Weight	1.6kg/unit

Build-to-Order	Thickness 3.9mm (1,250mm width)
Price (material price)	7,900 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 1,250mm (width) × 500mm (depth), Stair Nosing Types: 5R, 10R
Packing	7 units/case
Weight	2.1kg/unit

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete Plain Steel Plate Urethane Waterproofing	Cement VG	Welded using designated welding rod	VG Sealant

Notes

- Special order sizes: Widths of 800mm, 850mm, 900mm, 1,050mm to 1,950mm (in 100mm increments) and 2,000mm. Please contact us about details.
- Please make anti-rust treatment when working with plain steel plate subfloor.
- Units cannot be joined together widthwise.
- 1 tube of Cement DB is included with each case.

Build-to-Order	Thickness 3.9mm (950mm width)
Price (material price)	4,950 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 950mm (width) × 320mm (depth), Stair Nosing Types: 5R, 10R
Packing	7 units/case
Weight	1.1kg/unit

Build-to-Order	Thickness 3.9mm (1,250mm width)
Price (material price)	6,500 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 1,250mm (width) × 320mm (depth) Stair Nosing Types: 5R, 10R
Packing	7 units/case
Weight	1.5kg/unit

*Installation method is the same as for VIEWGISTA STEP YVLT.

VIEWGISTA HOLLOW DRAIN EX

Air Conditioner Drain (hollow type)

Mold Resistant

Thickness 5.0mm

Price (material price)	1,800 JPY/m
Dimensions	5.0mm (thickness) × 50mm (width) × 25m (length)
Packing	25m/roll
Weight	5.0kg/roll

Notes



- Preferable subfloor: Mortar, Concrete, Urethane Waterproofing Material
- Adhesive: Cement EP20/Cement VG
- Seams: Welded using VIEWGISTA designated welding rod
- * VIEWGISTA HOLLOW DRAIN EX and HOLLOW DRAIN HOLDER EX are sold together with VIEWGISTA.

A supplementary item that prevents diffusion of water from outside unit of air conditioner. Thin design enables to lessen level gap between drain pipe and sheet.

				Product Color Numbers	
VCD-207	VCD-211	VCD-201	VCD-212	VCD-201	212
				206	213
				207	214
				208	
				211	

VCD-214	VCD-213	VCD-208	VCD-206
---------	---------	---------	---------

Configuration (Unit: mm)
<Cross Section>

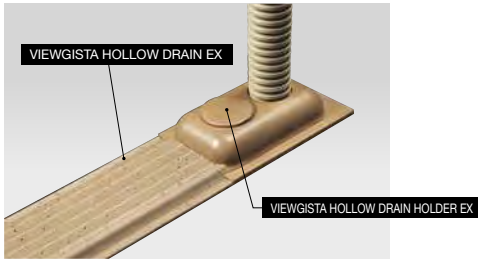

Shown connected with drain

- * Please make an even water gradient of 1/100 or higher.
- * VIEWGISTA HOLLOW DRAIN EX and HOLLOW DRAIN HOLDER EX are specially designed for drains of household-type wall-mounted air conditioners. Draining hot water from a hot water supply device, etc. through the product for a long period of time may lead to discoloring or deformation.

VIEWGISTA HOLLOW DRAIN HOLDER EX

Air Conditioner Drain Hose Fixed Connection Section (for use with VIEWGISTA HOLLOW DRAIN EX)

Mold Resistant

Price (material price)	12,000 JPY/set
Dimensions	50mm (width) × 93mm (depth) × 17mm (height)
Packing	20 holders, 40 caps, 1 container of instant glue
Weight	0.5kg/set


Notes

- * Drainage hose : 18mm Φ .
- * VIEWGISTA HOLLOW DRAIN EX and HOLLOW DRAIN HOLDER EX sold in set together with VIEWGISTA.



Connects the drainage hose from the air conditioner with the hollow drain. Features a newly redesigned shape.

				Product Color Numbers	
VCH-207	VCH-211	VCH-201	VCH-212	VCH-201	212
				206	213
				207	214
				208	
				211	

VCH-214	VCH-213	VCH-208	VCH-206
---------	---------	---------	---------



Configuration (Unit: mm)
<Cross Section>

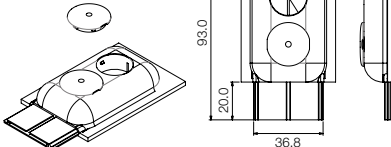

CORNER GUARD

CORNER GUARD


Thickness 2.5mm

Price (material price)	1,600 JPY/m
Dimensions	2.5mm (thickness) × 80mm (width) × 30m (length)
Packing	30m/roll
Weight	7.0kg/roll
Compatible Subfloor	Urethane Waterproofing Material

Notes

- * Please apply Stair Nosing Primer (sold separately) to the subfloor.


Configuration (Unit: mm)
<Cross Section>





Step Edge Guard for raised balcony areas



VCG-1

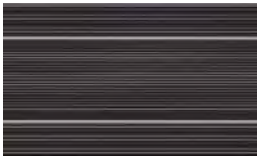


VCG-2

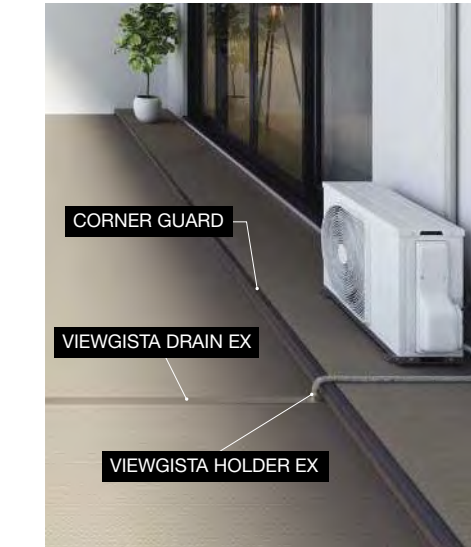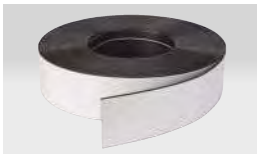

Product Color Numbers

VCG-1	2
-------	---


A supplementary item that prevents diffusion of water from an air conditioner. Features a redesigned shape.

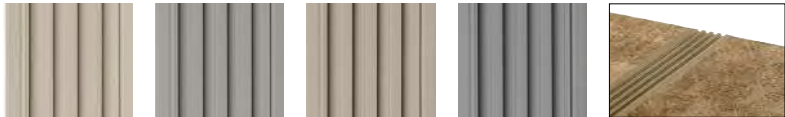

VDN-107	VDN-111	VDN-101	VDN-112
HOLDER EX VDH-107	HOLDER EX VDH-111	HOLDER EX VDH-101	HOLDER EX VDH-112

VDN-114	VDN-113	VDN-108	VDN-106
HOLDER EX VDH-114	HOLDER EX VDH-113	HOLDER EX VDH-108	HOLDER EX VDH-106

Configuration (Unit: mm)
<Cross Section>



Product Color Numbers

VDN-101	112
106	113
107	114
108	
111	

This product allows two air conditioner drainage hoses to be connected to a drain. Features a redesigned shape.



VDH-107	VDH-111	VDH-101	VDH-112
---------	---------	---------	---------

VDH-114	VDH-113	VDH-108	VDH-106
---------	---------	---------	---------

Product Color Numbers

VDH-101	112
106	113
107	114
108	
111	

VIEWGISTA DRAIN EX

Air Conditioner Drain

Mold Resistant

Thickness 3.0mm

Price (material price)	1,100 JPY/m
Dimensions	3.0mm (thickness) × 38.5mm (width) × 25m (length)
Packing	25m/roll
Weight	2.9kg/roll

Notes

- Preferable subfloor: Mortar, Concrete, Urethane Waterproofing Material
- Adhesive: Cement EP20/Cement VG
- Seams: Welded using VIEWGISTA designated welding rod
- * Please make an even water gradient of 1/100 or higher.
- * Hot water may deform the product.

VIEWGISTA HOLDER EX

Air Conditioner Drain Hose Fixed Connection Section (for use with VIEWGISTA DRAIN EX)

Price (material price)	12,000 JPY/set
Dimensions	28.5mm (thickness) × 28.5mm (depth) × 40mm (height)
Packing	20 holders, 40 caps, 1 container of instant glue
Weight	0.3kg/set

Notes

- * Drainage hose : 18mm Φ
- * VIEWGISTA DRAIN EX and VIEWGISTA HOLDER EX sold in set together with VIEWGISTA.

EVACUATION HATCH SIGN

Build-to-Order Product VIEWGISTA Safety Support Material



Order Example



Base Color: VGG-701

EVACUATION HATCH SIGN
600-B-701

Size DESIGN Color No.

Minimum Order: 1 sign,
Production Lead Time: 3 weeks
* For details, please contact your nearest Tajima location.

Attention attracting sign which emphasizes visibility of falling point of evacuation ladder.

3 DESIGNS

Choose one design from below.



A Type



B Type



C Type

8 COLORS

The base color can be selected from below VIEWGISTA GRAN Gio colors.
* The color of the yellow section is VIEWGISTA AQUA VAQ-810.



VGG-701



VGG-702



VGG-703



VGG-704



VGG-705



VGG-706



VGG-707



VGG-708

3 SIZES

You can select a size suitable for your balcony space.

300×300mm	10,000 JPY/sign (material price)
450×450mm	11,000 JPY/sign (material price)
600×600mm	12,000 JPY/sign (material price)

VIEWGISTA AQUA

Suitable for outside and inside poolside. Various color options and high quality of heat-shielding performance

Product Color Numbers		
VAQ-801	806	811
802	807	812
803	808	
804	809	
805	810	

floor score

TC0315008
JIS A 5705

Low VOCs

Weather Resistance

Heavy Foot Traffic


Heat Shielding

Slip Resistant function

Antichemical

Thickness 2.5mm

Price (material price)	5,100 JPY/m ² 9,282 JPY/m
Material Classification	Multilayer Vinyl Flooring FS
Dimensions	2.5mm (thickness of projected areas) × 1,820mm (width) × 10m (length)
Packing	10m/roll
Weight	45.7kg/roll

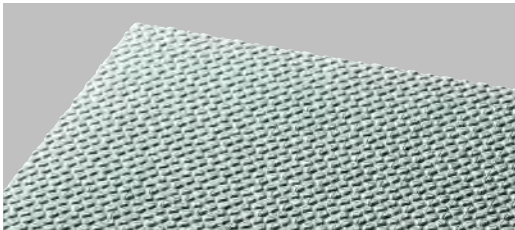

Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete	Cement EP20	Welded using designated welding rod	Edge Sealant
	Urethane Liquid - applied Membrane Waterproofing	Cement VG		

Notes

- Refer to pages 292 to 295 for how to properly use adhesive according to installation environment and conditions.
- When installing over a large area, embossed patterns may be out of position. We ask for your understanding.
- Please contact us for information on cut sheet sales.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160049
------------------	--

Sheet Size/Cross Section/Configuration

Sheet Size

Cross Section Image

Pattern (mm)

* Please be aware that pattern matching is not possible.



VAQ-801



VAQ-802



VAQ-803



VAQ-804



VAQ-805



VAQ-806



VAQ-807



VAQ-808



VAQ-809



VAQ-810




VAQ-811



VAQ-812

Related Item Compatibility Chart

	Step	Welding Rods	Edge Sealant
VAQ-801	same color/pattern VST-801	V-801Y	VAQ-801E
VAQ-802	-	V-802Y	VAQ-802E
VAQ-803	same color/pattern VST-803	V-803Y	VAQ-803E
VAQ-804	-	V-804Y	VAQ-804E
VAQ-805	-	V-805Y	VAQ-805E
VAQ-806	-	V-806Y	VAQ-806E
VAQ-807	-	V-807Y	VAQ-807E
VAQ-808	-	V-808Y	VAQ-808E
VAQ-809	-	V-809Y	VAQ-809E
VAQ-810	-	V-810Y	VAQ-810E
VAQ-811	-	V-811Y	VAQ-811E
VAQ-812	-	V-812Y	VAQ-812E
Page	⇒ 185	-	-

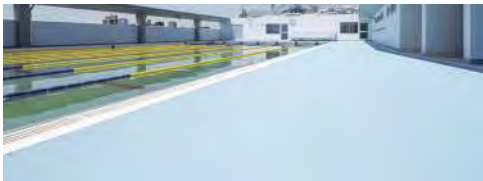

VAQ-801

Product Color Numbers	Product Color Numbers
VST-801	VGK-801
803	803

VIEWGISTA STEP VST AQUA Type

Step flooring sheet for VIEWGISTA AQUA, with same color nosing

Low VOCs

Weather Resistance

Super Heavy Foot Traffic

Antichemical

Slip Resistant function

Visibility

Heat Shielding

Thickness 3.9mm

Price (material price)	9,700 JPY per unit
Material Classification	Weather resistance and Slip resistance Vinyl Flooring for Stair Use
Dimensions	3.9mm (thickness of projected areas) × 1,850mm (width) × 320mm (depth) Stair Nosing Type: 5R (10R: Build-to-Order)
Packing	7 units/package
Weight	2.2kg/unit


Installation Method	Subfloor	Adhesive	Seams	Edge
Basic Installation	Mortar Concrete Steel Plate Urethane Waterproofing	Cement VG	Welded using designated welding rod	Edge Sealant for STEP AQUA

Notes


- Special order sizes: Widths of 800mm, 850mm, 900mm, 950mm to 1,950mm (in 100mm increments) and 2,000mm. Please contact us for order criteria and production lead time information.
- Please provide sufficient anti-rust treatment when working with steel plate subfloor.
- Units cannot be joined together widthwise.
- Please contact us for 10R stair nosing products.
- Two tubes of Cement DB are included with each case.

Special Characteristics

Flame Resistance	Flame Resistance Performance Test Number E1160049
------------------	--

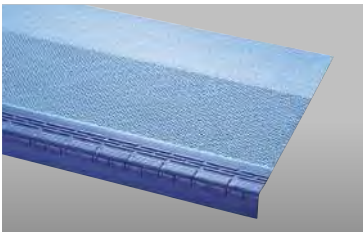

VST-801

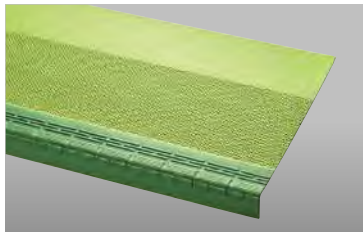


VST-803

Related Item Compatibility Chart

	Sheet	Edge Sealant (for vertical surfaces)
VST-801	Same color/pattern VAQ-801	VAQ-801ET
VST-803	Same color/pattern VAQ-803	VAQ-803ET
Page	⇒ 184	-

Configuration (Unit: mm)

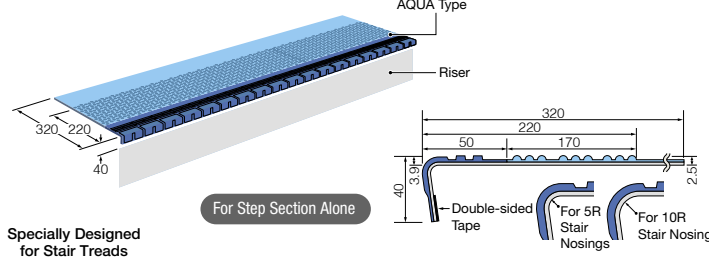

Sheet Vinyl for Risers

Designed for use with VIEWGISTA STEP VST AQUA Type



VGK-801





VGK-803

Related Item Compatibility Chart

	Sheet	Step	Edge Sealant (for vertical surfaces)
VGK-801	Same color/pattern VAQ-801	Same color/pattern VST-801	VAQ-801ET
VGK-803	Same color/pattern VAQ-803	Same color/pattern VST-803	VAQ-803ET
Page	⇒ 184	⇒ 185	-

Configuration

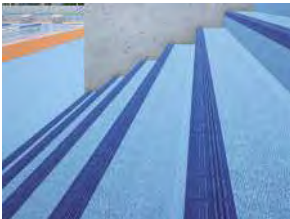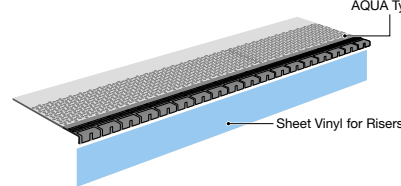

VST-801, VGK-801

VIEWGISTA Supplementary Installation Materials



Cement VG

Specifications	
Type	Urethane Resin Solvent Type Adhesive
Application	Adhesive for Water resistant Installation of Vinyl Flooring
Quantity	18kg can 9kg can
Price	27,000 JPY (18kg can) 14,500 JPY (9kg can)



VG Primer CP

Specifications	
Type	Urethane Solvent-type Primer
Application	Subfloor Primer for Checker Plate
Quantity	8kg can
Price	15,000 JPY/can



Edge Sealant for VIEWGISTA
AQUA/STEP AQUA

Specifications	
Type	Epoxy Resin Two-Component Type
Application	Edge sealing
Quantity	2kg/set
Price	16,400 JPY/set



Cement EP20

Specifications	
Type	Epoxy Resin Solvent Type Adhesive
Application	Adhesive for Water resistant Installation of Vinyl Flooring
Quantity	16kg (A component and B component set) 8kg (A component and B component set)
Price	25,500 JPY (16kg can set) 13,500 JPY(8kg can set)



VG Sealant

Specifications	
Type	Urethane Resin One-Component Sealant
Application	Sealant for raised sections and sheet edge
Quantity	320cc cartridge (2 cartridges/box)
Number of Colors	9 colors (VG-1 to VG-9)
Price	6,750 JPY/box



Stair Nosing Primer

Specifications	
Type	Urethane Resin Solvent Type Primer
Application	Subfloor Surface Reinforcement for Stair Nosing Sections
Quantity	0.4kg can
Price	2,150 JPY/can



Cement DB

Specifications	
Type	Urethane Resin-type Elastic Adhesive
Application	Adhesive for steps, underside of VIEWGISTA STEP sections placed over nosings, landings, and risers
Quantity	320cc cartridge (1 cartridge/box)
Price	1,900 JPY/box

Guide for Standard Use Quantities of Supplementary Materials *Calculated using 250mm steps and 200mm risers as a basis.


Product Name	Package Type	VIEWGISTA	VIEWGISTA Step VLT		VIEWGISTA Step VST		VIEWGISTA STEP VST AQUA	VIEWGISTA Step CP	
			950mm width	1,250mm width	950mm width	1,250mm width		950mm width	1,250mm width
Cement VG 18kg	Can	Approx. 55m ²	120 stairs	92 stairs	216 stairs	164 stairs	110 stairs	-	-
Cement EP20 16kg	Can Set	Approx. 48m ²	-	-	-	-	-	-	-
Cement DB	1 cartridge/box	-	10 stairs	7 stairs	10 stairs	7 stairs	4 stairs	10 stairs	7 stairs
VG Sealant	2 cartridges/box	40m	21 stairs	18 stairs	15 stairs	12 stairs	-	7 stairs	6 stairs
Edge Sealant for VIEWGISTA AQUA	2kg/set	50m	-	-	-	-	-	-	-
Edge Sealant for STEP AQUA	2kg/set	-	-	-	-	-	8 stairs	-	-
Stair Nosing Primer	Can	-	-	-	140 stairs	100 stairs	70 stairs	-	-
VG Primer CP	Can	-	-	-	-	-	-	72 stairs	55 stairs

* Stair Nosing Primer is required when not installing riser material on mortar or concrete Subfloor.
* One Cement DB cartridge is included in each case of VIEWGISTA STEP (2 cartridges included in each case of AQUA). Please place a separate order if the quantity is insufficient.

VIEWGISTA

VIEWGISTA Performance


Weather Fade Resistance

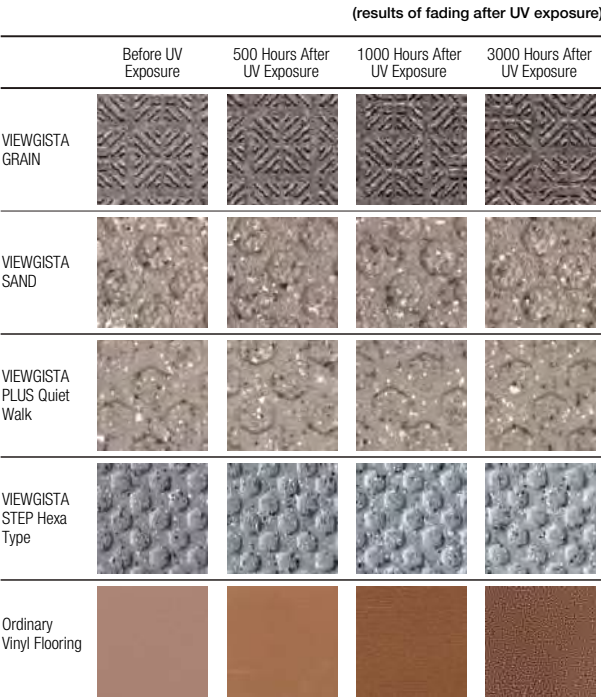

JIS A 1415 Methods of exposure to laboratory light sources for polymeric material of buildings

Dimensional Stability

Test Results

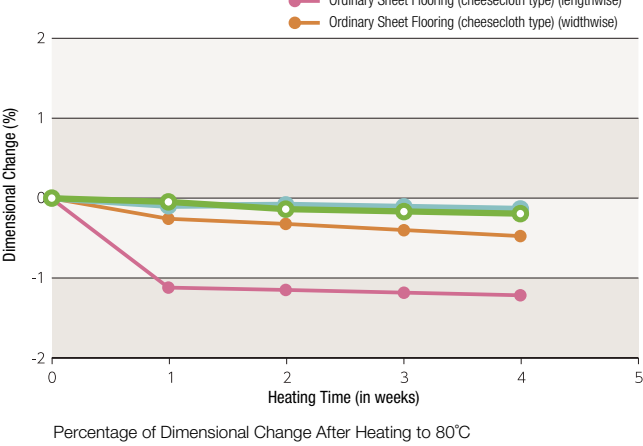

VIEWGISTA Characteristics

Large Lineup

Large Product Lineup for a Variety of Settings and Needs
Offers a color scheme designed to harmonize the ceilings, walls, and floors of spaces combining a variety of designs and new functions.

Dimensional Stability


All VIEWGISTA Products Can be Used Outdoors
Dimensional stability has been improved by providing a tough surface layer and non-woven glass intermediate layer for all VIEWGISTA products, making them fully outdoor-ready.

Installation Efficiency

Improved Installation Efficiency
Since this sheet is lighter than conventional floor sheets (up to about 30% lighter) and also more flexible, it can be installed efficiently. In addition to the conventional length cutting, width cutting has also been enhanced to help improve work efficiency.

* Refer to "VIEWGISTA Catalog" for details.

Slip Resistance

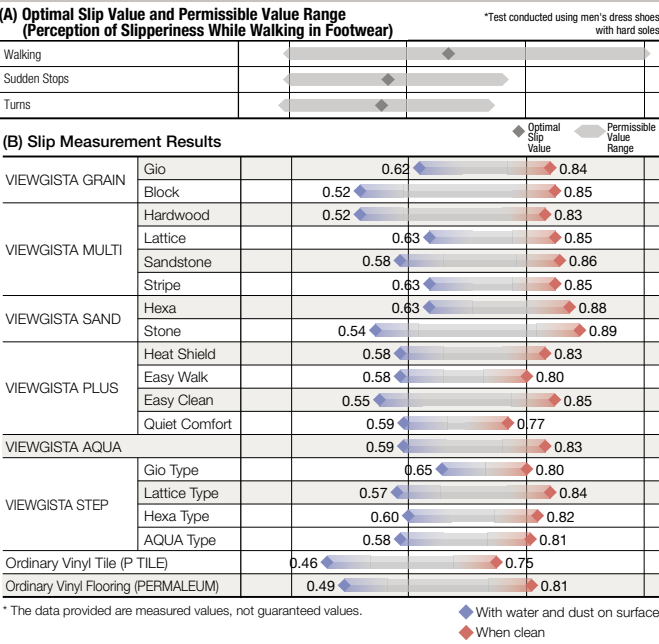

Slip tests conducted in accordance with JIS A 1454 "Test methods-Resilient floorcoverings"

Abrasion Resistance

Test Results

Product Name		Abrasion Amount (mm)
VIEWGISTA GRAIN		0.06
VIEWGISTA MULTI		0.04
VIEWGISTA SAND		0.10
VIEWGISTA PLUS	Quiet Walk	0.06
	Easy Clean	0.05
	Heat Shield	0.04
VIEWGISTA AQUA		0.12
VIEWGISTA STEP	Gio Type	0.06
	Hexa Type	0.06
	AQUA Type	0.06
Ordinary Vinyl Flooring		0.34

*These values are measured values, not guaranteed values.

Abrasion resistance tests conducted in accordance with JIS A 1454 "Test methods-Resilient floorcoverings"