


TAPIS PLAYNUE II

Available in 30 colors and 4 stripe patterns

- Factory-based Recycling
- Solution-Dyed
- Flame Resistant
- Medium Foot Traffic
- Low VOCs
- Antielectricity
- Lightweight

Thickness 6.0mm

Price (material price)	5,400 JPY/m² 21,600 JPY/case
Material Classification	Carpet Tile (Loop Pile)
	Pile: 100% Polypropylene Fiber
Material	Backing Layer: Special PVC + Non-woven glass sheet (lightweight backing)
Dimensions	6.0 (thickness)×500×500mm
Pile Height	3.0mm
Pile Density	1/10 gauge × 12.5 stitches
Packing	16 tiles/case (equivalent to 4m²)
Weight	17.1kg/case

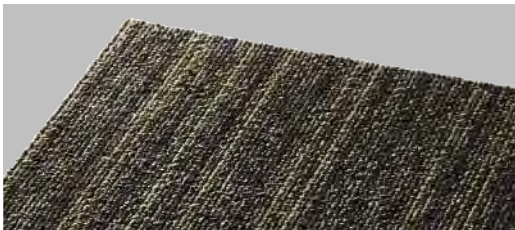

Subfloor	Adhesive
Mortar Concrete Raised Floor	Anti-slip adhesive

Notes


[Plain/Pinstripe]

- Checkered pattern installation is standard for this product. Joints may be more noticeable if a monolithic layout is used.
- Due to the design characteristics of Pinstripe, corners may appear to be misaligned after installation.



[Random Stripe/Multi Stripe/Block Stripe]

- Please use monolithic or checkered pattern. Please be sure to confirm the installation pattern before installation.
- When using a monolithic layout, patterns cannot be matched since line placement is different for each carpet tile. Please check the sample photo to see how the carpet tiles look after installation.
- When using a checkered pattern layout, due to the design characteristics of Urban, corners may appear to be misaligned after installation.
- If the pattern seems unusual or the joints are noticeable after installation, replacing some tiles will provide a more natural appearance.
- Joints may be more noticeable when a lighter colored tile is used. Also it tends to be found dirt on the surface easily, please be careful.
- Tiles may appear color unevenness immediately after installation. This is due to weight compression and will become normal over time when the piles are standing.



Special Characteristics

Electrostatic Propensity	1.0kV or less (23°C, 25%RH, synthetic shoe sole/JIS L 4406)
Color Fastness	Light Fastness Grade 5 (JIS L 4406) Friction Fastness (dry) Grade 4 or above (JIS L 4406)
Flame Resistance	Flame Resistance Performance Test Number ET900005
F☆☆☆☆	Certification Number J04-30190

Plain



481-223 Silver Gray 1



481-242 Moon Stone 7



481-235 Sand Beige 13



481-224 Ash Gray 2



481-222 Steel Gray 8



481-275 Almond 14




481-225 Slate Gray 3



481-246 Smoked Blue 9



481-264 Café au lait 15



481-269 Antique Gray 4




481-227 Hydrangea 10



481-260 Rich Brown 16



481-271 Charcoal Black 5



481-273 Celeste Blue 11



481-276 Spice Brown 17



481-272 Piano Black 6




481-274 Blue Jeans 12



481-277 Roasted Coffee 18

Tile Size/Cross Section

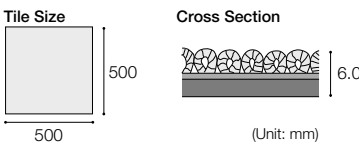


481-262 Cream Yellow 19



481-281 Spring Green 25




481-258 Naples Yellow 20




481-282 Forest Green 26




481-278 Classic Caramel 21




481-283 Yacht Blue 27




481-256 Coral Pink 22



481-284 Tangerine Orange 28



481-279 Lilac Rose 23



481-285 Signal Red 29



481-280 Chianti Pink 24



481-254 Dark Amethyst 30

Product Color Numbers [Plain]

481-222 8	235 13	258 20	271 5	276 17	281 25
223 1	242 7	260 16	272 6	277 18	282 26
224 2	246 9	262 19	273 11	278 21	283 27
225 3	254 30	264 15	274 12	279 23	284 28
227 10	256 22	269 4	275 14	280 24	285 29



Plain 481-223, 225, 280, 282, 284, 285



Pinstripe 481-813



Random Stripe 481-845 (monolithic pattern), Plain 481-260

TAPIS PLAYNUE II

- Factory-based Recycling
- Low VOCs
- Solution-Dyed
- Antielectricity
- Flame Resistant
- Lightweight
- Medium Foot Traffic

Pinstripe



481-813
Fit 274




481-801
Fit 223, 225



481-802
Fit 223, 225



481-814
Fit 271, 272



481-813



481-806
Fit 258, 260



481-815
Fit 275, 276



481-816
Fit 235, 277



481-817
Fit 271, 276

Random Stripe




481-841
Fit 223, 269



481-842
Fit 223, 225, 271



481-843
Fit 269, 271, 272



481-844
Fit 269, 273



481-845
Fit 260, 275





481-846
Fit 264, 271, 276

TAPIS PLAYNUE II color composition makes color coordination easy

The TAPIS PLAYNUE II stripe pattern products are provided in the same colors available for TAPIS PLAYNUE II [Plain].

Fit indicates colors that are recommended for use in borders and points in a walkway.



Multi Stripe




481-851
Fit 276, 278



481-854
Fit 278, 284




481-852
Fit 223, 271



481-855
Fit 269, 271, 281




481-853
Fit 269, 271, 272



481-856
Fit 271, 272, 285


Block Stripe



481-891
Fit 223, 271



Multi Stripe 481-854 (monolithic), Plain 481-276

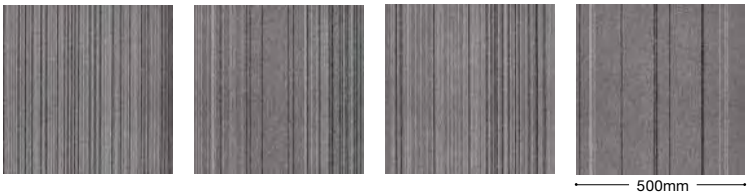

Multi Stripe consists of four different patterns. Please check the photo above showing the carpet tiles when installed.

* Different cases may contain different quantities for each pattern. It cannot be chosen particular pattern by your request.



Block Stripe 481-891 (checkered pattern), Plain 481-223



Block Stripe consists of four different patterns. Please check the photo above showing the carpet tiles when installed.

* Different cases may contain different quantities for each pattern. It cannot be chosen particular pattern by your request.


TAPIS TRESSA

Features sharp contrast and color gradation. Available for both monolithic and quater-turn layout

- Factory-based Recycling
- Solution-Dyed
- Flame Resistant
- Medium Foot Traffic
- Low VOCs
- Antielectricity
- Lightweight

Thickness 6.0mm


Price (material price)	5,400 JPY/m² 21,600 JPY/case
Material Classification	Carpet Tile (Loop Pile)
	Pile: 100% Polypropylene Fiber
Material	Backing Layer: Special PVC + Non-woven glass sheet (lightweight backing)
Dimensions	6.0 (thickness)×500×500mm
Pile Height	3.0mm
Pile Density	1/10 gauge × 12.5 stitches
Packing	16 tiles/case (equivalent to 4m²)
Weight	17.1kg/case

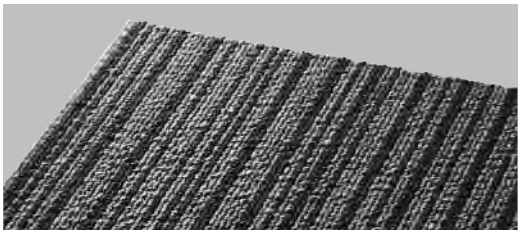

Subfloor	Adhesive
Mortar Concrete Raised Floor	Anti-slip adhesive

Notes


- Please use monolithic or checkered pattern. Please be sure to confirm the installation pattern before installation.
- When using a monolithic layout, patterns cannot be matched since line placement is different for each carpet tile. Please check the sample photo to see how the carpet tiles look after installation.
- When using a checkered pattern layout, due to the design characteristics of Urban, corners may appear to be misaligned after installation.
- If the pattern seems unusual or the joints are noticeable after installation, replacing some tiles will provide a more natural appearance.
- Tiles may appear color unevenness immediately after installation. This is due to weight compression and will become normal over time when the piles are standing.



Special Characteristics

Electrostatic Propensity	1.0kV or less (23°C, 25%RH, synthetic shoe sole/JIS L 4406)
Color Fastness	Light Fastness Grade 5 (JIS L 4406) Friction Fastness (dry) Grade 4 or above (JIS L 4406)
Flame Resistance	Flame Resistance Performance Test Number ET090072
F☆☆☆☆	Certification Number J09-30580

Tile Size/Cross Section

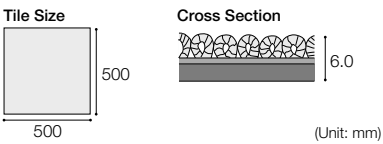

TRESSA




483-3601



483-3605



483-3609



483-3602



483-3606




483-3610




483-3603



483-3607



483-3611



483-3604



483-3608




483-3612




TRESSA 483-3607 (monolithic pattern)


Gradation



483-3621



483-3622

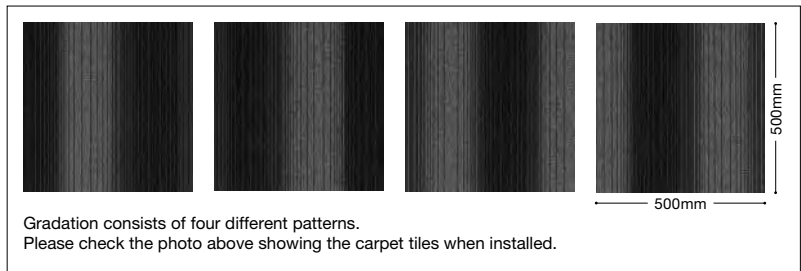

* Different cases may contain different quantities for each pattern. It cannot be chosen particular pattern by your request.



Gradation 483-3622 (monolithic pattern)